UNCLASSIFIED

AD NUMBER
AD037857
LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; JUL 1954. Other requests shall be referred to Office of Naval Research, One Liberty Center, 875 North Randolph Street, Arlington, VA 22203-1995.

AUTHORITY

onr ltr 26 oct 1977

THIS PAGE IS UNCLASSIFIED

COLUMBIA UNIVERSITY

Hudson Laboratories

Dobbs Ferry, N. Y.

PROJECT MICHAEL

Contract N6-ONR-27135

Technical Report No. 17

Wave Generation by Point Sources
by
W. A. Nierenberg

W. A. Nierenberg
Director

Research Sponsored by
Office of Naval Research

Copy No. 046

of 65 Copies   July 7, 1954

This report consists of 11 pages

TABLE OF CONTENTS

WAVE GENERATION BY POINT SOURCES

by

W. A. Nierenberg

I. Introduction

The problem of wave generation in water of arbitrary depth by complicated situations such as moving ships, surface disturbances, etc., has been discussed many times. However, the treatment of the simple model of a point source at a fixed circular frequency has not been published. The advantages of such a model are obvious. The judicious disposition of such sources in space can be used as a rough model for almost any source of disturbance. The Fourier synthesis of the solution can be used to interpret the disturbance by a source varying with the time in any manner.

In this report, the exact solution for all distances from the source for a point source in a linearized theory is obtained a la Lamb. Application is made to a dipole source whose dimension is short compared to the wavelength of the generated disturbance at large distances.

II. The Differential Equation and the Boundary Conditions

In this problem, the equation to be solved is the equation of continuity on the velocity potential Φ .

$$\nabla^2 \Phi = 0 \qquad\qquad (1)$$

The solution to this equation will be made to satisfy the free surface boundary condition and the condition of a spherical source at a depth h from the surface. The z -axis coincides with the vertical, with z being measured as positive in the upward direction. The water depth is H. The usual technique of splitting the region into two parts using a horizontal plane through $z = z_1$ will be followed. The region $0 \geqslant z \geqslant z_1$ will be labeled with the subscript I, the region $z_1 \geqslant z \geqslant -H$ with the subscript II. The elementary solutions for the two regions are:

$$\Phi_I = e^{i\omega t}\left(A e^{kz} + B e^{-kz}\right) J_0(kr) \tag{2}$$

$$\Phi_{II} = e^{i\omega t}\left(C e^{kz} + D e^{-kz}\right) J_0(kr) \tag{3}$$

ω is the circular frequency of the harmonic source, k is the separation constant, A, B, C, D are arbitrary constants, and r is the cylindrical radius from the origin. The boundary conditions to be satisfied are:

$$\frac{\partial^2 \Phi_I}{\partial t^2} + g \frac{\partial \Phi_I}{\partial z} = 0 \quad , \quad z = 0 \tag{4}$$

$$\frac{d' Z_{II}}{dz} - \frac{d Z_I}{dz} = \frac{kV}{2\pi} \quad , \quad z = z_1 \tag{5}$$

$$\frac{\partial \Phi_I}{\partial t} = \frac{\partial \Phi_{II}}{\partial t} \quad , \quad z = z_1 \tag{6}$$

$$\frac{\partial \Phi_{II}}{\partial t} = 0 \quad , \quad z = -H \tag{7}$$

Equation 4 is the well known free surface condition. In Eq. 5 Z refers to the z-factor of Eqs. 2 and 3. The discontinuity in the z component of the velocity is illusory, for the final linear combination will involve an integral like "

$\int_0^\infty J_0(k\eta)k\,dk$ which is equivalent to $\delta(\eta)$. Equation 6 represents continuity in pressure. Equation 7 requires vanishing vertical motion at the bottom boundary. V is a constant which will be interpreted subsequently.

The indicated substitutions are performed. The constants are evaluated. Finally, the simple linear combination of summation over all k is chosen, yielding

$$\bar{\Phi}_I = \frac{V}{2\pi} e^{i\omega t} \int_0^\infty \frac{\cosh k(H+z_1)}{gk\sinh kH - \omega^2 \cosh kH} \left\{ gk\cosh kz + \omega^2 \sinh kz \right\} J_0(k\eta)\,dk \quad (8)$$

$$\bar{\Phi}_{II} = \frac{V}{2\pi} e^{i\omega t} \int_0^\infty \frac{gk\cosh kz_1 + \omega^2 \sinh kz_1}{gk\sinh kH - \omega^2 \cosh kH} \cosh k(H+z) J_0(k\eta)\,dk \quad (9)$$

There is still an ambiguity in the path of integration: the integrand has two poles on the real axis given by

$$\omega^2 = gk\tanh kH \quad (10)$$

These roots are of the same absolute value but opposite in sign . We will call them $\pm k_0$. The path of integration is chosen to avoid the pole by a small semicircular excursion into the upper half of the complex plane. (Fig. 1) This will guarantee
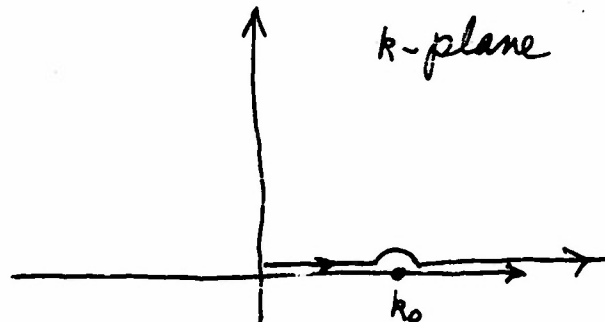

Figure 1

that the final solution will consist only of outgoing waves at infinity. We note that the real solutions of Eq. 10 give the correct phase velocity for the outgoing waves.

Finally, there is the question of verifying the singularity at the origin and obtaining the normalization of the source. Inspection of Eqs. 8 and 9 shows that the integrals go to infinity as both $n \rightarrow \infty$ and $z \rightarrow z_1$. Furthermore, the infinite contributions come from the very large values of k in the integrand. Therefore, to the approximation that $n \rightarrow 0$ and $z \rightarrow z_1$

we may approximate the solution by

$$\Phi_I \Rightarrow \frac{V}{4\pi} e^{i\omega t} \int_0^\infty e^{-k(z-z_1)} J_0(kn) dk = \frac{V}{4\pi} \frac{e^{i\omega t}}{R} \tag{11}$$

$$\Phi_I \Rightarrow \frac{V}{4\pi} e^{i\omega t} \int_0^\infty e^{k(z-z_1)} J_0(kn) dk = \frac{V}{4\pi} \frac{e^{i\omega t}}{R} \tag{12}$$

$$R = \frac{1}{\sqrt{(z-z_1)^2 + n^2}}$$

It follows that, in the neighborhood of the singularity, the solution is represented by a source whose peak strength is V units of volume per second.

III. The Evaluation of the Integral

In addition to the two real poles, the integrands of Eqs. 8 and 9 have an infinite number of pure imaginary poles, symmetrical as to sign, given by Eq. 10. These roots will be denoted by k_n, $n = \pm 1, \pm 2, \pm 3$. There are two limiting cases of general interest.

Case 1.   or the shallow water approximation.

In the limit we find:

$$|Hk_m| = n\pi \qquad\qquad n = 1,2,3\ldots\ldots (13)$$

Case 2.   There is no simple approximation

for k_n but the early roots start as

$$|Hk_n| = (2n-1)\frac{\pi}{2} \qquad n = 1,2,3\ldots\ldots (14)$$

For large values of n, the solution turns over to agree with (13)
but the first roots are the only practical ones in the limiting
solution. If more than a few roots are required, the series ex-
pansion from the origin is more useful. Since there are no branch
points, the integral is evaluated by elementary technique yielding

$$\Phi_I = \Phi_{II} = \frac{Ve^{i\omega t}}{2iH}\sum_{n=0}^{\infty}\frac{\cosh k_n(H+z)\cosh k_n(H+z_1)}{1 + \frac{1}{2k_nH}\sinh 2k_n H}\,H_o^2(k_nR) \qquad (15)$$

where H_o^2 ($\mathcal{U}$) is the zero-order Hankel function of the second
kind. This is the solution to the problem. It is to be noticed
that the artificial division of the solution valid for two regions
has disappeared in the final expression in Eq. 15. This must be
so and the fact that this occurs is a check on the solution. It
will be convenient to regard Eq. 15 as the Green's function for the
problem.

In any practical application, this solution can be used to
idealize the situation by appropriate combinations of sources and
sinks. As an important example, we shall consider, in addition
to the source at the origin, another source whose coordinate is

$$z = z_2, \quad \pi = \alpha, \quad \varphi = 0 \qquad\qquad \text{which is oscillating just } \pi$$

radians out of phase with the first. In this case, we have the

difference of the two solutions. Since the various addition theorems are to be applied, the solution is manipulated in a preliminary way:

$$\Phi = \frac{Ve^{i\omega t}}{2iH} \sum_{n=0}^{-\infty} \frac{\cosh k_n(H+z)\left[\cosh k_n(H+z_1) - \cosh k_n(H+z_2)\right]}{1 + \frac{1}{2k_nH}\sinh 2k_nH} H_0^2(k_n r)$$

$$+ \frac{Ve^{i\omega t}}{2iH} \sum_{n=0}^{-\infty} \frac{\cosh k_n(H+z)\cosh k_n(H+z_2)}{1 + \frac{1}{2k_nH}\sinh 2k_nH}\left[H_0^2(k_n r) - H_0^2(k_n r_1)\right] \tag{16}$$

where r_1 is the cylindrical coordinate measured from the second source.

The two terms of Eq. 16 may be written in a more familiar form through the use of addition theorems.

$$\Phi = \frac{Ve^{i\omega t}}{2iH} \sum_{n=0}^{-\infty} \frac{2\cosh k_n(H+z)\sinh k_n\frac{z_1-z_2}{2}\sinh k_n(H+\frac{z_1+z_2}{2})}{1 + \frac{1}{2k_nH}\sinh 2k_n H} H_0^2(k_n r)$$

$$+ \frac{Ve^{i\omega t}}{2iH} \sum_{n=0}^{-\infty} \frac{\cosh k_n(H+z)\cosh k_n(H+z_2)}{1 + \frac{1}{2k_nH}\sinh 2k_n H} \times \tag{17}$$

$$\left[\left\{1 - J_0(k_n d)\right\} H_0^2(k_n r) - 2\sum_{m=1}^{\infty} J_m(k_n d) H_m^2(k_n r)\cos m\varphi\right] \qquad d < r.$$

This solution is exact. In the next section various approximations are considered.

IV. The Various Approximations

1. The Asymptotic Approximation

In this approximation, the concern is with the wave amplitude at distances such that $k_0 r \gg 1$. The customary technique is to employ the asymptotic expansions of the Bessel functions. In addition, we recognize that the terms for $n = 0$ yield the outgoing waves, whereas the terms $n = -1, -2$, etc., yield exponentially damped waves with distance. In practice, the damped terms may generally be neglected at about one wavelength from the source. This approximation gives

$$\bar{\Phi} = \frac{V \cosh k_0 (H+z)}{2H\left(1 + \frac{1}{2k_0 H}\sinh 2k_0 H\right)} \frac{e^{i\omega t - ik_0 r - \frac{i\pi}{4}}}{\sqrt{\frac{1}{2}\pi k_0 r}} \times$$

$$\left[2\sinh k_0 \frac{z_1 - z_2}{2}\sinh k_0\left(H + \frac{z_1 + z_2}{2}\right) \right.$$

$$\left. + \cosh k_0 (H + z_2)\left\{1 - J_0(kd) - 2\sum_{m=1}^{\infty} e^{\frac{im\pi}{2}} J_m(kd)\cos m\varphi\right\} \right] \tag{18}$$

2. The Shallow Water Asymptotic Approximation

In this approximation, the departure is Eq. 18 with the additional assumption that $k_0 H \ll 1$. The expression further simplifies to

$$\bar{\Phi} = \frac{V e^{i\omega t - ik_0 r - \frac{i\pi}{4}}}{4H\sqrt{\frac{1}{2}\pi k_0 r}} \times$$

$$\left[k_0^2 (z_1 - z_2)\left(H + \frac{z_1 + z_2}{2}\right) + 1 - J_0(kd) - 2\sum_{m=1}^{\infty} e^{\frac{im\pi}{2}} J_0(kd)\cos m\varphi \right] \tag{19}$$

This approximation is intentionally inconsistent in the terms of the second order. The effect of the vertical separation of sources vanishes in first order and the second order terms have been kept for the special case $d = 0$. It is also useful to have an expression for an isolated source to the same approximation. Reference to Eq. 16 yields

$$\overline{\Phi} = \frac{e^{i\omega t - ik_o \mathcal{R} - \frac{i\pi}{4}}}{4 H \sqrt{\frac{1}{2}\pi k_o \mathcal{R}}} V \tag{20}$$

3. The Dipole Approximation in Shallow Water

In this approximation, the assumption is made that the two sources are considerably less than a wavelength apart or that both $k_o \mathcal{R} \ll 1$ and $|k_o (z_1 - z_2)| \ll 1$

To terms of the first order only,

$$\overline{\Phi} = - \frac{k_o d \cos \varphi \, e^{i\omega t - ik_o \mathcal{R} + \frac{i\pi}{4}}}{4 H \sqrt{\frac{1}{2}\pi k_o \mathcal{R}}} V \tag{21}$$

In effect, the single source is reduced by the fraction $k_o \rho_1 \cos \varphi$. The effect of the vertical separation $z_1 - z_2$ in shallow water is of higher order and is evaluated in Eq. 19.

There are further useful approximations but they will not be listed here since they are of secondary importance.

V. Numerical Estimates

As an example of the order of magnitude of the effects involved, we consider the case $H = 100'$, $\omega = \pi/10 \; sec^{-1}$, single source.

Since $\quad \mathcal{P} = \rho \dfrac{\partial \varphi}{\partial t}$

$$\mathcal{P}_{max} = \frac{\rho \, \omega \, V}{2H \sqrt{2\pi \, k_o \, \Omega}} \tag{20a}$$

This corresponds to a wavelength of 1120 ft. If an overpressure of 1 inch of water (approx. 5 lbs/ft^2) is considered at a distance of 1000 ft, the peak flow volume in ft^3 per sec is

$$V = 9.0 \times 10^3 \quad ft^3/sec \qquad \text{or}$$

$$V = 5.4 \times 10^5 \quad c.f.m.$$

If the source is a horizontal doublet of spacing 20 ft the V required would be 6×10^6 ft^3/min which is considerable. For purposes of computation, it is convenient to write Eq. 20a in terms of ω and H alone.

$$\mathcal{P}_{max} = \frac{g^{1/4} \, \rho \, \omega^{1/2}}{2 H^{3/4} \sqrt{\Omega}} V \frac{1}{\sqrt{2\pi}} \tag{20a}$$

This indicates a rather slow dependance on ω .

fpr

DISTRIBUTION LIST

PROJECT MICHAEL TECHNICAL REPORTS

Director
Naval Research Laboratory (2021)
Washington 20, D. C.

Director
Naval Research Laboratory
Code 1109
Washington 20, D. C.

Committee on Undersea Warfare
National Research Council

Via: Contract Administrator
Southeast Area
Office of Naval Research
c/o George Washington University
2110 G Street N.W.
Washington, D. C.

Commanding Officer & Director
U.S. Navy Electronics Laboratory
San Diego 52, California

..rine Physical Laboratory

Via: U.S. Navy Electronics Laboratory
Code 1200
San Diego, California

Commanding Officer & Director
U.S. Navy Underwater Sound Laboratory
Fort Trumbull
New London, Connecticut

Director
U.S. Navy Underwater Sound Reference Laboratory
P.O. Box 3629
Orlando, Florida

Commander
U. S. Naval Ordnance Laboratory
White Oak
Silver Spring 19, Maryland

Commander
U.S. Naval Air Development Center
Johnsville, Pennsylvania

2   Chief of Naval Operations (Op-316)
Navy Department
Washington 25, D. C.

Chief of Naval Operations (Op-31)
Navy Department
Washington 25, D. C.

Commander, Submarine Force
U.S. Atlantic Fleet
U.S. Naval Submarine Base
Box 27
New London, Connecticut

Commander, Submarine Force
U.S. Pacific Fleet
Fleet Post Office
San Francisco, California

Commanding Officer & Director
David Taylor Model Basin
Washington 7, D. C.
Att: Mr. Lasky

Commanding General
Headquarters, Air Force
Washington 25, D. C.

Commanding Officer
Signal Corps Engineering Laboratory
Squier Signal Laboratory
Fort Monmouth, New Jersey

DISTRIBUTION LIST

PROJECT MICHAEL TECHNICAL REPORTS

Commander
U.S. Naval Ordnance Test Station
Pasadena Annex
3202 E. Foothill Boulevard
Pasadena 8, California

Chief, Bureau of Ships (Code 845)
Navy Department
Washington 25, D. C.

Chief, Bureau of Ships (Code 520)
Navy Department
Washington 25, D. C.

Chief, Bureau of Ships (Code 371)
Navy Department
Washington 25, D. C.

Chief, Bureau of Ships (Code 849)
Navy Department
Washington 25, D. C.

Chief, Bureau of Ships (Code 847)
Navy Department
Washington 25, D. C.

Chief, Bureau of Aeronautics (EL 46)
Navy Department
Washington 25, D. C.

Chief, Bureau of Ordnance
Navy Department
Washington 25, D. C.

Commander-in-Chief
U.S. Atlantic Fleet
U.S. Naval Station
Norfolk 11, Virginia

DISTRIBUTION LIST

PROJECT MICHAEL TECHNICAL REPORTS

Commander, Operational Development Force
U.S. Atlantic Fleet
U.S. Naval Base
Norfolk 11, Virginia

Commander-in-Chief
U.S. Pacific Fleet
Fleet Post Office
San Francisco, California

Commander, Submarine Development Group Two
U.S. Naval Submarine Base
Box 70
New London, Connecticut

Commanding Officer
Office of Naval Research Branch Office
1030 E. Green Street
Pasadena, California

Commanding Officer
Office of Naval Research Branch Office
1000 Geary Street
San Francisco, California

Commanding Officer
Office of Naval Research Branch Office
86 E. Randolph Street
Chicago 1, Illinois

Mr. R. N. Hamme
3039 Randall Laboratory
Engineering Research Institute
University of Michigan
Ann Arbor, Michigan

Via: Office of Naval Research Branch Office
86 E. Randolph Street
Chicago 1, Illinois

DISTRIBUTION LIST

PROJECT MICHAEL TECHNICAL REPORTS

Dr. J. R. Frederick
Engineering Research Institute
University of Michigan
Ann Arbor, Michigan

Via: Office of Naval Research Branch Office
      86 E. Randolph Street
      Chicago 1, Illinois

Commander
Surface Antisubmarine Development Detachment
U.S. Naval Station
Key West, Florida

Officer-in-Charge
Office of Naval Research Branch Office
Navy #100
FPO New York, New York

Commanding Officer
Office of Naval Research Branch Office
346 Broadway
New York 13, New York

Edwards Street Laboratory
Yale University
Box 1916, Yale Station   Via: ONR, New York
New Haven, Connecticut
Att: Professor L. W. McKeehan

2   Bell Telephone Laboratories
     Murray Hill   Via: ONR, New York
     New Jersey

     Lamont Geological Observatory
     Torrey Cliff   Via: ONR, New York
     Palisades, New York

v

DISTRIBUTION LIST

PROJECT MICHAEL TECHNICAL REPORTS

Commanding Officer
Office of Naval Research Branch Office
150 Causeway Street
Boston, Massachusetts
Att: Dr. F. V. Hunt

Research Analysis Group
Brown University   Via: ONR, Boston
Providence, Rhode Island

Director
Woods Hole Oceanographic Institution
Woods Hole, Massachusetts   Via: ONR, Boston
Att: Dr. J. B. Hersey

12   Head, Undersea Warfare Branch
     Office of Naval Research, Code 466
     Washington 25, D. C.
     Att: LCDR W. W. Upshaw, USN

Armed Services Technical Information Agency

AD 37857